

# How to Upgrade SXmini G Class to V6.700


**SX550A** chip is the same as **SX550J** chip, just different production batches.

Before upgrading, please check the **Device information** on SXi driver.

If your device is powered by **SX550J chip**, please upgrade with SX550J firmware.

If your device is powered by **SX550A chip**, please upgrade with SX550A firmware.

1. Please install SXi-Q driver Version **2.8.3.1** (or higher versions) to upgrade your SXmini G Class.

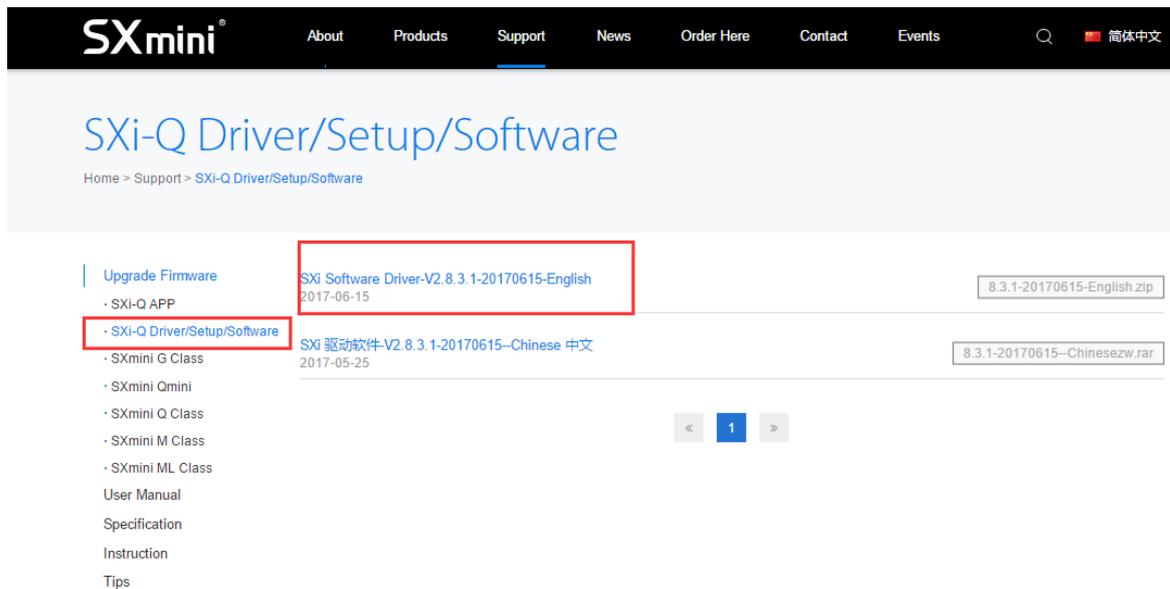

2. Download the SXmini G Class V6.700 upgrade file, please read the important notice before upgrading.

**SXmini**®    About    Products    Support    News    Order Here    Co

# SXmini G Class

Home > Support > SXmini G Class

- Upgrade Firmware
  - SXi-Q APP
  - SXi-Q Driver/Setup/Software
  - SXmini G Class**
  - SXmini Qmini
  - SXmini Q Class
  - SXmini M Class
  - SXmini ML Class
- User Manual
- Specification
- Instruction
- Tips

SXmini G Class(Bata upgrade version-20170615)V6.700  
2017-05-25

SXmini G Class(Latest upgrade version-2017/4/21)V5.500  
2017-04-21


SXmini G Class( SXmini\_Logo\_20170213) V4300  
2017-02-16

SXmini G Class ( Factory Version -20170106) V4000  
2017-01-20



< 1 >

### 3. Upgrade:

Plug in SXmini G Class with USB, if the SXi can not detect the device, please Install Driver first.

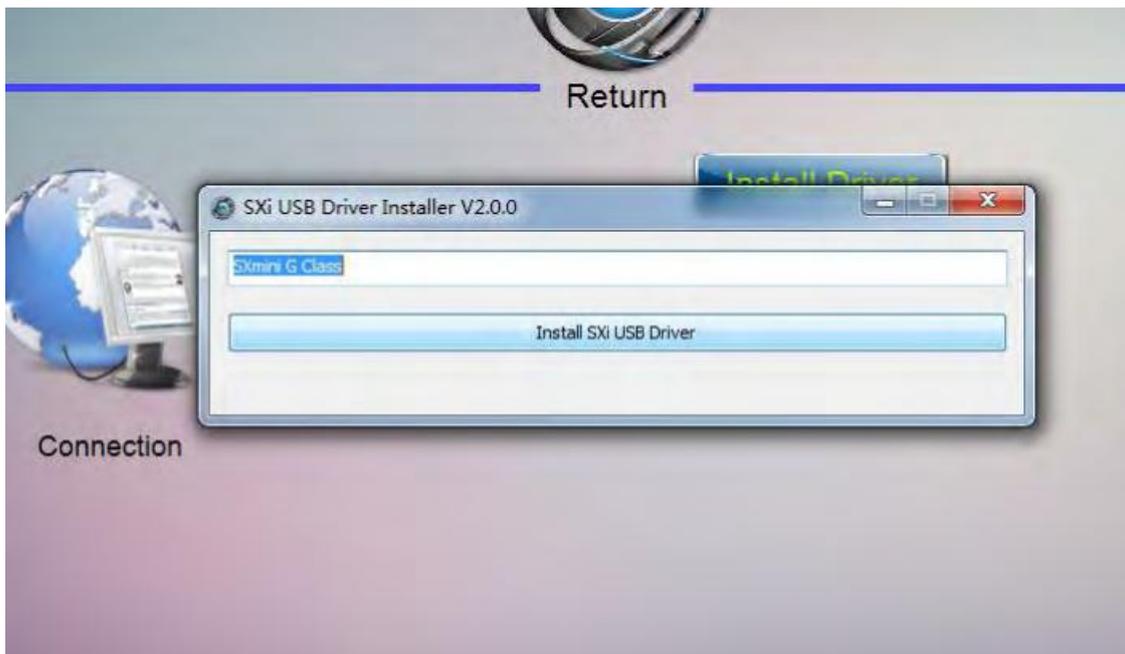


4. When device is connected, please go to “upgrade”.

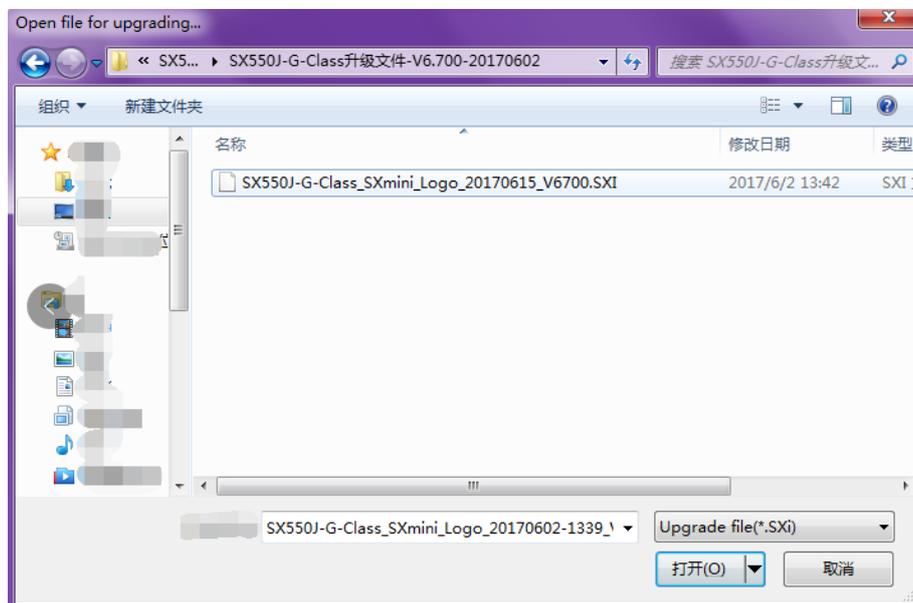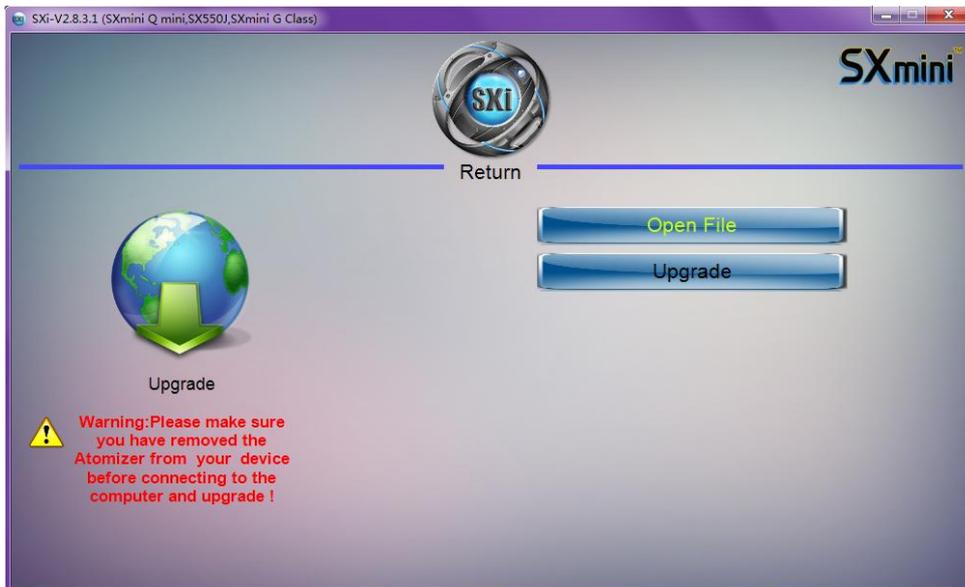

5. The first upgrade finished. Please **unplug your device** now.



6. The device shows "Please **connect to the computer again** and upgrade to new system"

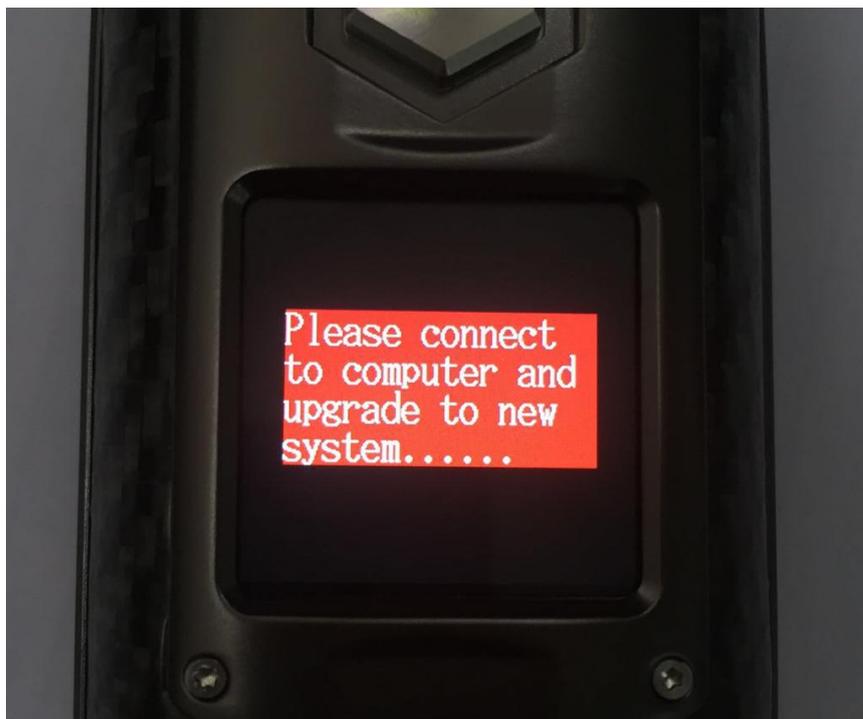



7. **Plug in the device and open SXi again**, the device will be upgraded to new system automatically.



8. Upgrade finished:

The device will be upgraded successfully, you can check the device information here:

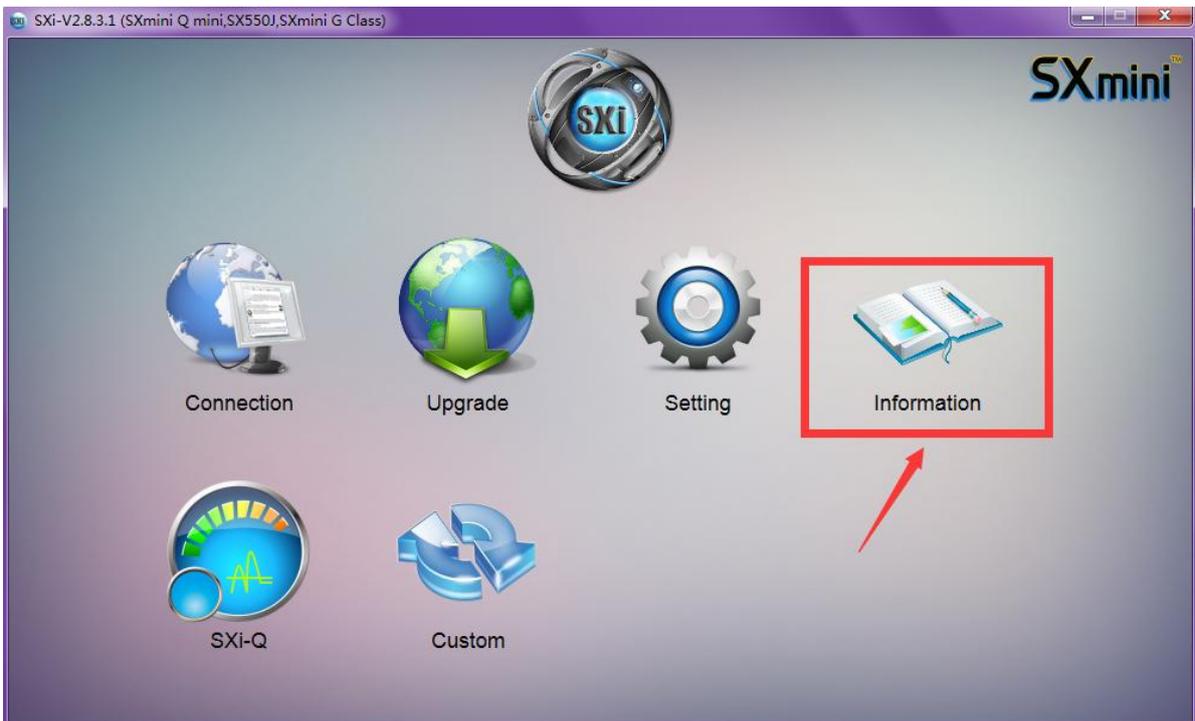

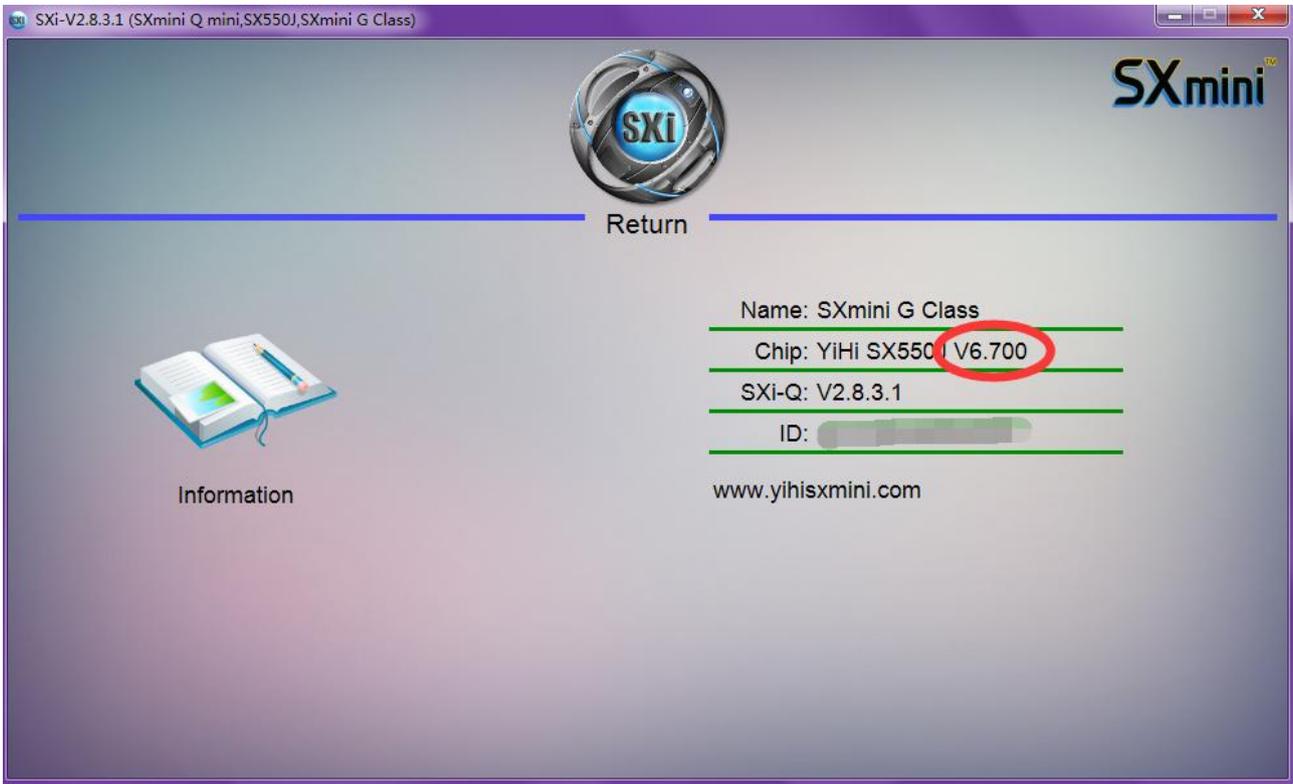


9. Please click fire button 5 times to turn on the device.




10. How to upload your own photo to SXmini G Class on SXi?

Check Setting page and find the Custom menu(Under C4):

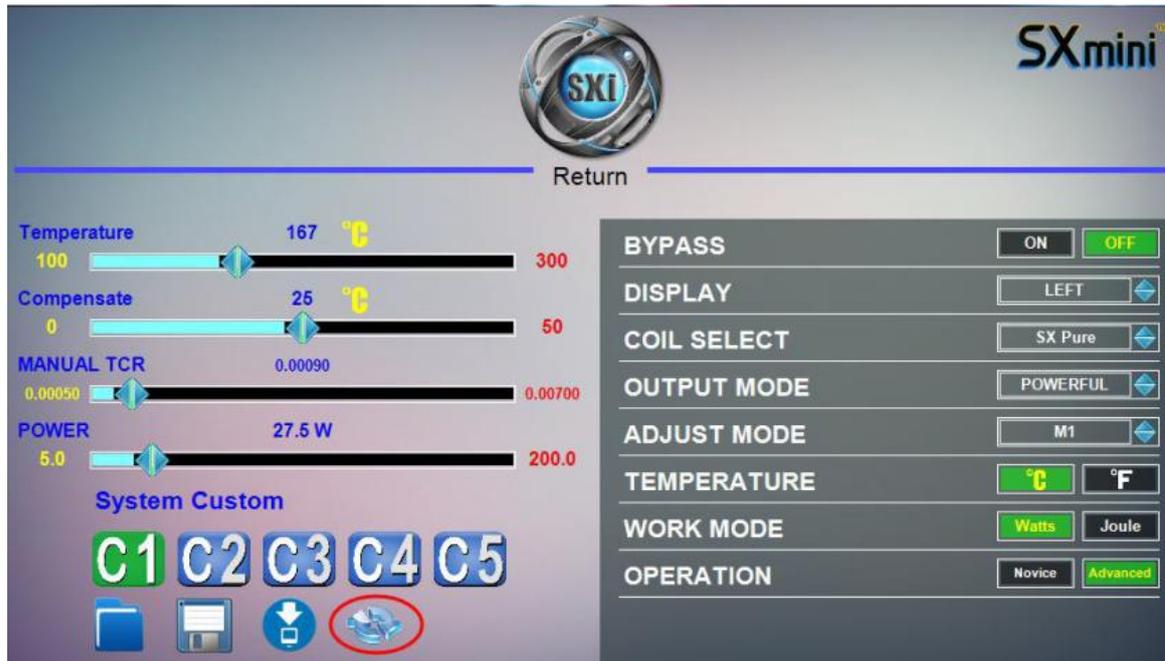


Prepare the photos with **240\*240** pixels first..


Loading till it turns Green then finished.

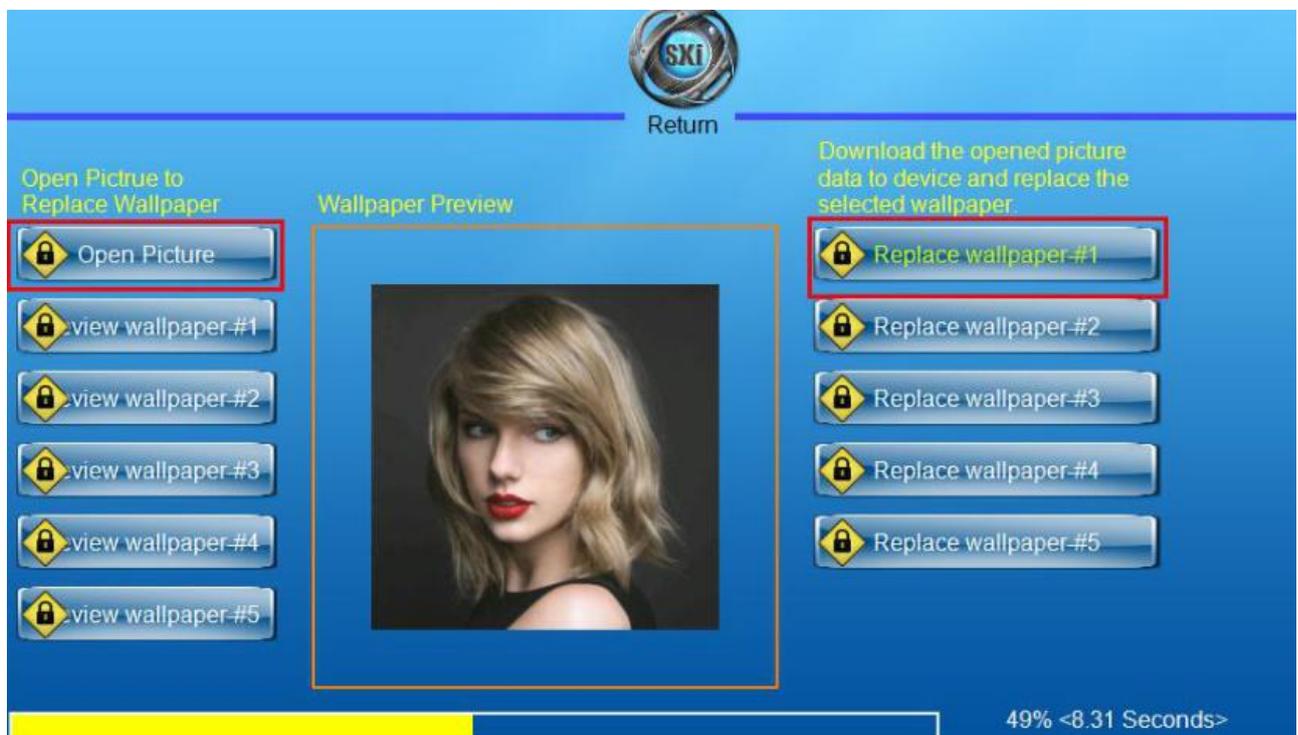

Don't forget to go back to **save your photo!**

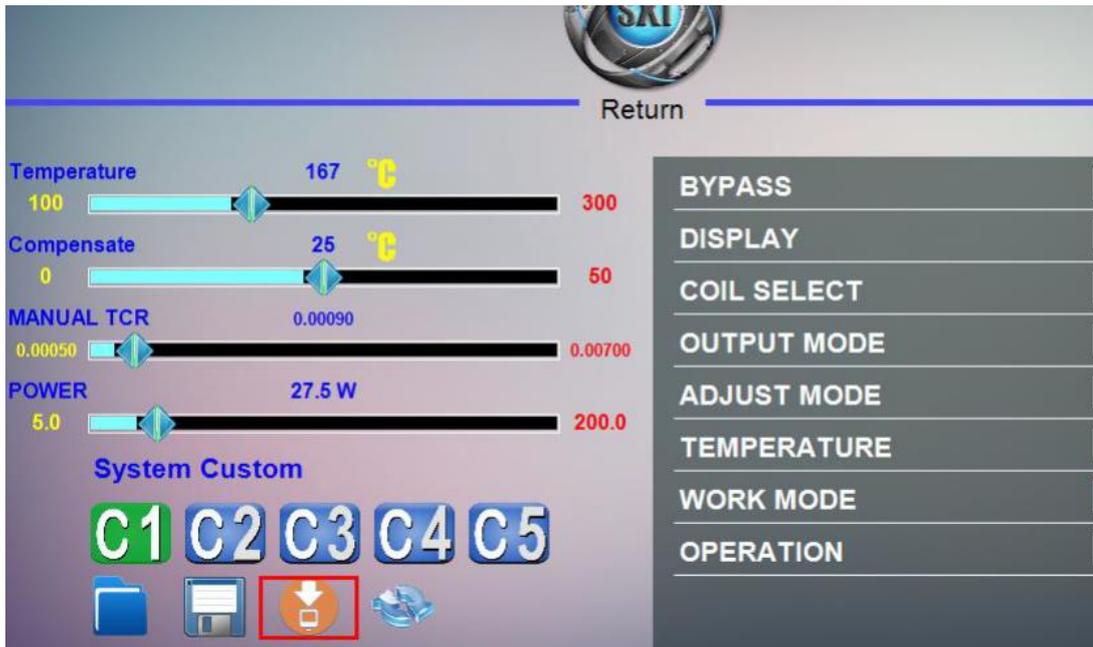

Here is your own wallpaper on SXmini G Class : )

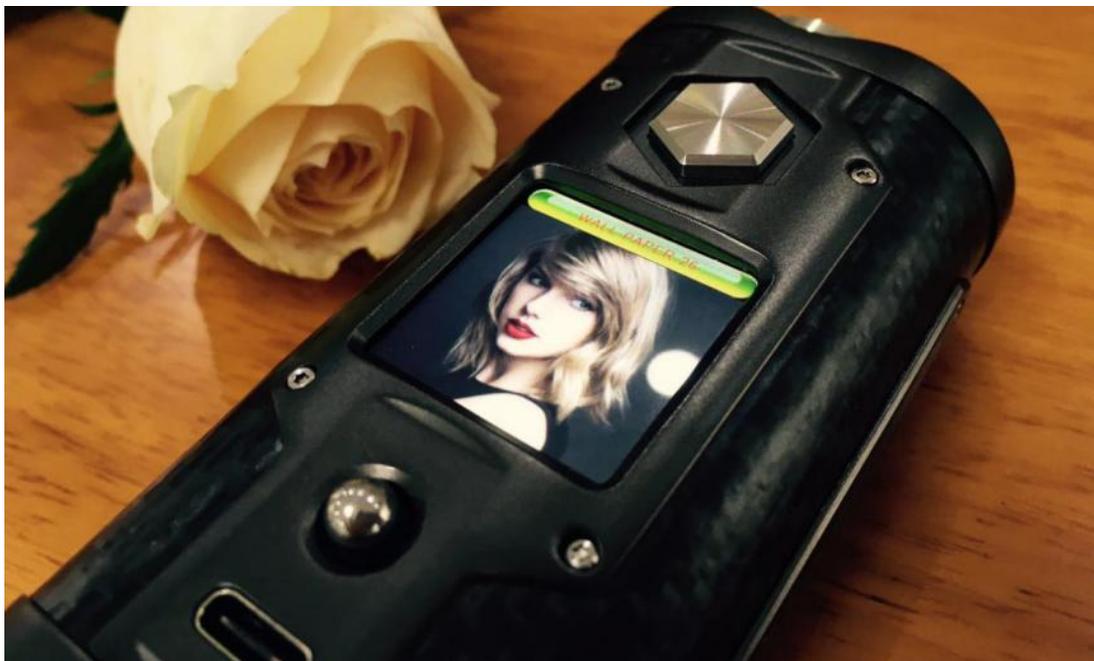

Thank you for your patience and support.

<http://www.yihisxmini.com>

SXmini Team  
2017/6/15