

SXmini[®]

MX Class
User Manual

www.yihisxmini.com

Content

1. English.....	1	8. Türkçe	69
2. 中文.....	9	9. Bahasa indonesia	77
3. Español.....	17	10. العربية	85
4. Français.....	25		
5. Italiano.....	35		
6. 한국어	44		
7. Deutsch.....	52		

Thank you for choosing the SXmini MX Class. It is designed specially for professional and high-end users. To ensure safety and proper usage, please review the included diagrams and read this manual carefully.

▶▶▶ Standard Configuration


- 1× SXmini MX Class device
- 1× USB cable
- 1× User manual
- 1× Warranty card
- 1× Warning card
- 1× Gift box & bag

▶▶▶ Specification & features:

- Powered by the YiHi SX480J-BT processor.
- It is a single 18650 battery device, with a maximum output of 75 watts.
- TFT ips HD screen
- Joystick control
- Bluetooth APP control, Android & iOS, adjust all settings on the phone.
- Size: L95.2mm X W44mm X H28 mm
- Variable Joule supports all TC wire, SS/Ti/Ni...
- Removable battery.
- New innovative technology SXi-Q control system - Customize your own taste, logo & menu name.
- Temperature control: Anti-dry burning technology.
- Output Joule: 10J-75J. 212-572°F / 100-300°C.
- Resistance: 0.05-0.3 ohms (Joule mode).
- Output Voltage: 0.7 - 9.5 Volts.
- Resistance: 0.05 ohm - 3.0 ohm (Power mode).
- Taste modes: Powerful+, Powerful, Standard, Soft, Eco & SXi-Q-S1~S5 and novice mode.
- Buck-Boost & Boost, DC-DC Converter.

- Zinc Alloy, Stainless Steel
- Upgradable firmware. Graphic user interface.
- Reverse polarity, short protection, low resistance, low battery voltage, overheating & battery over-charge protection.

▶▶▶ Reference Diagram

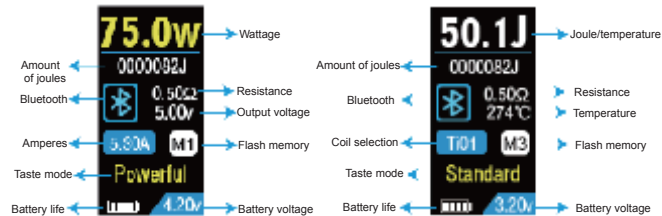

▶▶▶ How to operate:

To turn the device On: Press the fire button 5 times, quickly, within 2 seconds

To turn the device Off: Click 5 times on the fire button to enter Menu and press the joystick down when choosing "SystAem Off."

To lock the device: Press the fire button three times to lock.

To unlock the device: Press the fire button three times to unlock.

▶▶▶ Shortcut operation in the main interface:

Joystick operation:

Pull the joystick left for 3 seconds to switch between Novice mode and Advanced mode.

1. Novice Mode:

The wattage can be adjusted. Press the joystick once, and the wattage will turn red. The parameter can be adjusted by pulling the joystick up and down.

2. Advanced Mode:

a. Push the joystick directly to adjust the Power, the Joule, the Temperature and the Coil. When it changes to red, the parameter can be adjusted by pulling the joystick up or down. When the temperature changes to red, the temperature units can be switched between Fahrenheit and Celsius by pulling the joystick left and right.

b. Move the Joystick right to switch the flash memory from M1 to M5.

c. Move Joystick left, to adjust the flavor mode (Eco, Soft, Standard, Power, Powerful+, SXi-Q-S1~S5)

3. Move the joystick up to adjust the brightness of the display.

4. Move the joystick down for 3 seconds to switch the device between bypass mode and normal mode.

5. Move the joystick right for 3 seconds to turn the Bluetooth on or off. When the Bluetooth signal turns white (📶), it means the Bluetooth has connected. When the Bluetooth signal turns blue (📶), it means the Bluetooth has disconnected. When the Bluetooth signal turns Grey, the Bluetooth has turned off.

6. Press the Joystick for 5 seconds to reset the resistance.

▶▶▶ Menu operation:

1. Press the fire button 5 times, quickly, to enter the menu.
2. Press the joystick up or down to adjust all the functions in the menu.
3. Choose the function that you need to adjust, press the joystick down one time to enter into the sub-menu to adjust the settings by pulling the joystick up or down.
4. Pull the joystick left to return to the Previous menu or back to the main interface.

System off	Turn off the device
Manual TCR	Adjust the value of TCR to use all kind of coil.
Bluetooth	Turn on the bluetooth to pair with device.
Standby time	Adjust the standby time of the main interface.
Check atomizer	Connect the atomizer or check the connection of atomizer.
No liquid	Anti-dry burning warning
Too hot	The chipset is too hot.
Low battery	The power of the battery is not enough.
Check battery	The voltage of battery is too low.
Low resistance	The resistance is too low.
Short	Output short.
High battery	The voltage of battery is too high.

▶▶▶ Menu operation:

- . It must Comply with the legal laws and regulations of the country or region you live in when you use it.
- . It is important to protect the display well.
- . It is prohibited to open the body of device, otherwise the warranty is invalid.
- . Do not leave the device in high temperatures or damp conditions, as this may damage the Device.
- . Please make sure the surface of the batteries is complete and undamaged before using.
- . If the e-liquid has leaked to the body of the device, please dry it in time, avoid deducing the service life of the device by damaging the internal chipset.
- . Check the authenticity of the device by entering the security code on our official website.
- . Any SXmini products which are not bought from our official distributor WILL NOT be covered by the factory warranty.
- . The USB port is mainly for upgrading purpose. If you prefer using it for charging, please plug or unplug carefully to ensure its using life. The warranty period of the device is one year and the USB port is three months from the date of purchase by the end user.
- . This device has future upgrade capability. The contents of this manual will have future updates. For the latest information, please refer to our website. If you have any problems while upgrading your SXmini MX class, please contact our customer service via email: Cservice@yihisxmini.com

▶▶▶ Instruction of Bluetooth function

- Please download the SXi app from the App store (for free) and install in your phone.
- Please enter the menu of the device, switch to Bluetooth, press the joystick to enter and then press joystick. The device begins to pair.
- Please turn on the Bluetooth of your cellphone and open the SXi app. Press “connecting” and the Bluetooth signal will twinkle for about 10 seconds. When it turns to grey, the device can connect to the phone. If connected, the Bluetooth signal will turn white.

Anti-hijacking and pairing Precautions:

- . When pairing, the App will create a new pairing code automatically with the device and this code will be remembered both by your phone and the device. There is no need to pair again after that if you haven't paired the device with other phone. Once the device remembers the code, other phones (Even the SXi APP has been installed) cannot be connected with this device as long as it has not paired with the device.

If the end user has many different phones, every time they change their phone to control the device, they will need to pair the device with the phone. The device only remembers the phone which has been newly paired.

- . If any questions, please contact with our customer service team: Cservice@yihisxmini.com