


733主机说明书英文版（风琴折）

尺寸：50*90mm（展开后尺寸550*90mm）

材质：100g双胶纸双面印刷

料号：

550mm



SXmini®

Additional languages at:
www.yihisxmini.com

User Manual

Reference Diagram

1. 510 Thread 27mm

2. Fire Button


3. LCD screen

4. Joystick

5. USB-C Charging Port

6. 18650/20700/21700 Battery (not included)

7. Battery Cap

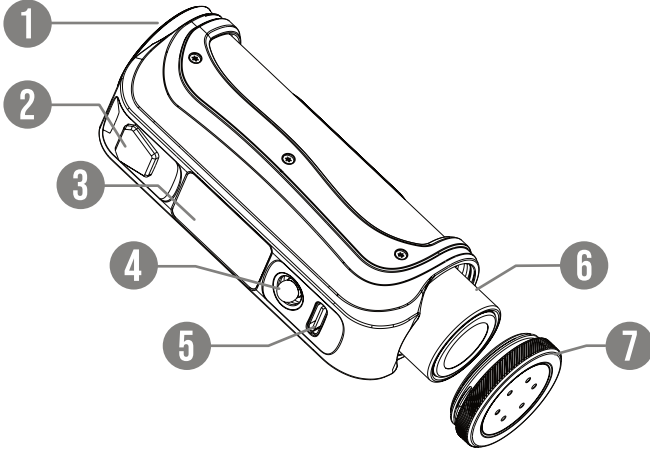

Main Screen layout

1

3

4

5

8

9

NEU

0000

60W

0.00 Ω

PURE

SS316L


0.00 V 0.00 A

2

6

7

10



1. Battery meter

2. Battery Percent

3. Current Curve

4. Puff Counter

5. Power Display

6. Live Ohm

7. Mode


8. Wire Type

9. Current voltage

10. Output current


Power Adjustment

Press Joystick to choose the power "UP" / "DOWN" to adjust.



Lock/Unlock

Fire Button X 3
Locks / Unlocks Device



Main Menu

5 x Fire Button to enter Main Menu
(Or push joystick right 3 seconds)

SYSTEM OFF

MODE: P


P.COUNTER

TWEAKS

STATS

TIMEOUT

EXIT



System off : Shut down device

Mode : Select modes

P.Counter : Puff Counter

Tweaks: Adjust more options

Stats: Stats and info

Timeout: Screen dims out

Exit: Exit main menu


Main Menu-Tweaks

TWEAKS

BRIGHTNESS

RESET

BACK



Brightness : Set screen brightness

Reset : To factory default

PURE

PURE is a vaping technology that uses temperature control to prevent dry hits and more toxins from evaporating due to over heating, resulting in a cleaner and safer vaping experience.

By maintaining and confining the temperature, it allows a broader spectrum of flavors that evaporate at different temperatures.

PURE improves battery life by constantly checking the temperature, and extends the coil lifespan by allowing the cotton to remain unscorched longer.

Setting PURE

Enter Main Menu (5 x Fire Button, or Push Joystick Right 3s)

Enter Mode Menu

MODE

WATTS

PURE


BACK

NEW READ: 0.0000Ω

OLD Ω LOCKED 0.0000Ω

LOCK NEW

USE OLD



1. Choose PURE mode

2. Choose 'LOCK NEW' for a fresh new installed coil.
Or choose 'USE OLD' only if you locked that same coil before.

Lock the new coil only when it is at room temperature.
if vaped earlier and it is warm, wait a few minutes before locking it.

Smart Curves Modes

Curves effects power in WATTAGE mode.

1) Joystick DOWN - to enter curves selection page.

2) Scroll and choose from the curves list

3) SXi-EQ 1,2 and 3 allow editing custom curves.

CURVES

NEUTRAL

EDIT

EXIT

Soft

Neutral

Strong

SXi-EQ 1 to 3

Power starts at 75% gradually to 100%

Power constant on 100%

Power starts at 125% gradually to 100%

User's customized curve profiles.

SXi-EQ mode Configuration

Press EDIT to enter curve configurations page.
Raise or lower the power percentage of each 0.5 second interval.
Left/Right to scroll time, Up/Down to adjust percentage.

SXi-EQ1 EDIT

FIRE:EXIT

0.0S

100%


[80W]

1

2

3

4

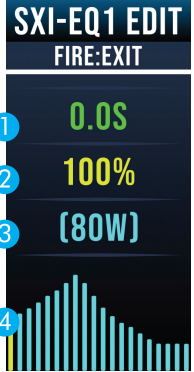

1. Selected Time interval –
Scroll through 0.5 intervals (total 10 seconds)

2. Raise/lower Power %
(between 50%-150%)

3. Computed Wattage derived from
base watt %

4. Live Power Curve Graph –
Each bar represents 0.5 seconds interval

Smart curves are all percentage-based, thus can be used globally
on all coil types without additional adjustments.

Notice

Error

Solutions

No Atomizer detected	Either the atomizer is not connected, or the unit has detected a problem	Try to reinsert coil, change a new coil
Low Battery	Battery voltage is too low, (lower than 3.2V)	Recharge device
Coil ohm too low	The resistance of the atomizer is too low (lower than 0.1ohm)	Change coil
Atomizer short	The unit has detected on output short	Change coil Contact support
Too hot	The internal board is overheating	Wait for it to cool down Contact support
No liquid	Temp-Control Dry Hit Protection	Add liquid / Check locked resistance / Make sure to lock ohm at room temp

Specifications

Included In The Box

• Chipset: YiHi SX733J

• 18650/20700/21700 battery

• Wattage mode: 5-100 W

• PURE mode: 5-60 W

• Size: 89.1*42.3*30.2mm

• Quiescent current <10μA

• Max charge: 5V/1A

*1 x SXmini SL PURE Mod

*1 x Hatsu Tank

*1 x Drip Tip

*1 x VT40 0.4Ω SS316 Mesh Coil

*1 x User Manual

*1 x USB Cable

*1 x Warranty Card

Precautions

Opening the body of the device voids warranty.
Avoid exposing the device to high temperatures or damp conditions, as this could cause damage.

If e-liquid has leaked into the device body, allow it to dry completely before use, as using it while damp may damage the electronics.

Check the authenticity of the device by entering the security code on our official website.

Be careful not to damage the USB port while charging.

The device warranty period is 12 months.

If you experience any issues with your device, our customer service team is available to assist you through our website.

SXmini

21+

Adult use only

Manufactured by YiHi

Add: Building 1, Yuanxia Road 25, Xiakeng Village, Changping Town, Dongguan City, Guangdong, P.R.China 523575

Executive standard: T/CECC 001-2021

TEL: +86 0769 83918966

FAX: +86 0769 83918966

www.yihisxmini.com

Designed by YiHi in China

Made in China

21+ RoHS